

# PATTERN PRINTING GUIDE

SUBLIPROFI.

**CMYK** | JPG | TIFF | PSD | RAW | **PDF** | no ICC | Text - transfered as curves

## General information

data scale **1:1** or **1:10**

file format - print **PDF, TIFF, PSD** or **JPEG**

recommended minimum quality of raster **150-300 DPI (1:1)** - Depends on the used material and viewing distance

color mode **CMYK**

text transfered as curves


## Size

maximum width of the source graphic data depends on the width of the fabric + 1-2 cm safe zone from each side

in addition to the specific requirements for pattern preparation, for "endless" printing, the data must also meet **Basic requirements for graphic data.**, which can be found in the Customer Information section of [www.subliprofi.com](http://www.subliprofi.com).

- i** the data must connect with the lower and upper edges so that, after laying out the strips underneath, it forms the desired pattern

original data

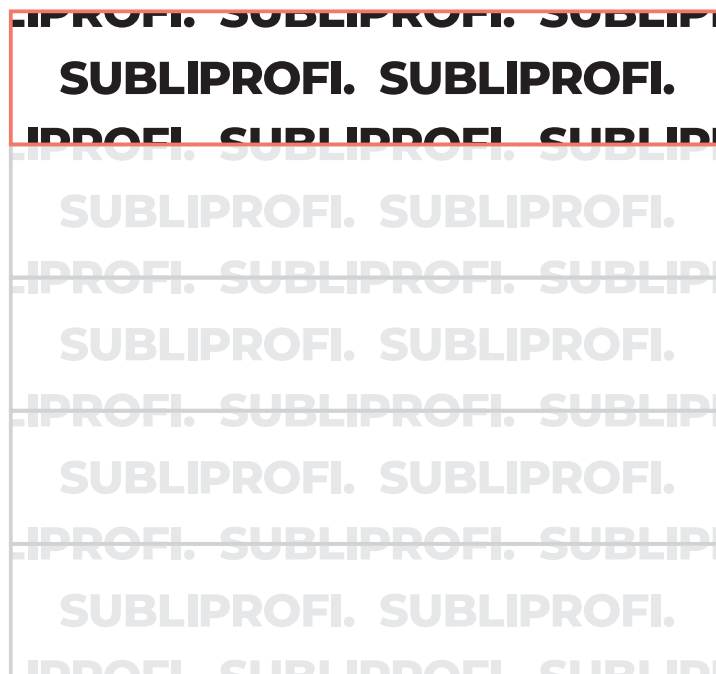

max. width of the source data = fabrics width -2 cm from each side

The data prepared according to this document will make it easier for us and speed up the whole process of printing. In case you will need some help with preparing data for printing, feel free to contact us.

Contact us via email [grafik@subliprofi.com](mailto:grafik@subliprofi.com) or tel.: **+420 774 230 307**

*This document is property of SubliProfi, s. r. o. . Copying, providing to third-party or using for different purposes than graphic data editing for SubliProfi, s. r. o. sublimation printing is forbidden.*

**Copyright © 2024 SubliProfi, s. r. o. All rights reserved**